

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 April 2003 (24.04.2003)

PCT

(10) International Publication Number  
**WO 03/034748 A1**

(51) International Patent Classification<sup>7</sup>: **H04N 13/00,**  
**G02B 27/22**

Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN DE WALLE, Gerjan, F., A.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN TONGEREN, Henricus, F., J., J.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/TB02/03842**

(22) International Filing Date:  
18 September 2002 (18.09.2002)

(74) Agent: **RAAP, Adriaan, Y.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(81) Designated States (*national*): CN, JP, KR.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).

(30) Priority Data:  
01203854.3 11 October 2001 (11.10.2001) EP


(71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Published:  
— with international search report

(72) Inventors: **FEENSTRA, Bokke, J.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **PRINS, Menno, W., J.**;

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **2D/3D DISPLAY APPARATUS**

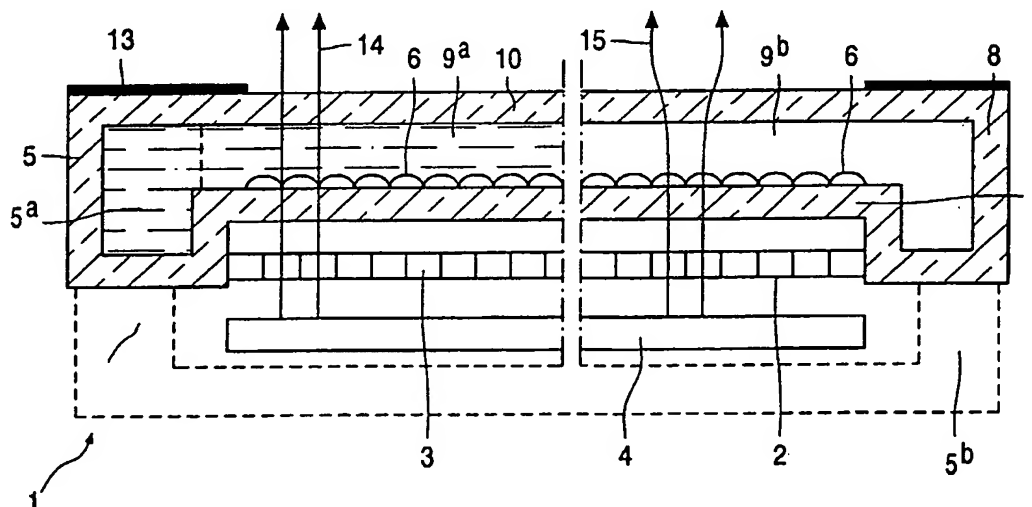

(57) Abstract: Switching between 2D and 3D visualization is achieved by an optical-index matching fluid (9) which can be brought between a lenticular sheet (6, 7) and a top plate (10). The fluid may contain two immiscible fluids while switching is based on (re)distribution of the fluids due to electrostatic forces.

WO 03/034748 A1

## 2D/3D display apparatus

The invention relates to a display apparatus provided with a display device for displaying images comprising pixels and further provided with means for switching between different types of images originating from the pixels.

5 The different types of images between which switching takes place are usually a two-dimensional image and a three-dimensional image. Said display apparatus is then suitable, for example, for a plurality of applications, for example, for displaying (moving) stereo images, on the one hand, and graphic text, on the other hand.

The display device for generating the images may be a liquid crystal display device, but also another suitable display device, for example, a device based on  
10 electroluminescence or switchable mirrors.

A display device of this type is shown in USP 6,069,650. In this document, a liquid crystal material is described which is present between a flat substrate and a substrate provided with elements having a lens action, in this case lens-shaped elements (referred to as lenticular sheet) and is switched between two states. In one state, the liquid crystal material  
15 has a refractive index which is substantially equal to that of the material of the lenticular sheet, and the information for both eyes is the same (two-dimensional image). In the other state, the liquid crystal material has a refractive index which is different from that of the material of the lenticular sheet. Also by suitable drive of the pixels, the information is now different for both eyes (three-dimensional image).

20 With a suitable liquid crystal material (having a small temperature dependence, the difference of refractive index between the two states is such ( of the order of 0.2) that the elements, which are lens-shaped in this case, require a large curvature so that the layer of liquid crystal material shows differences of thickness and, consequently, an uneven switching behavior.

25 Moreover, the liquid crystal material is anisotropic. This means that, for light passed through the liquid, the difference of refractive index between the ordinary and the extraordinary refractive index is not the same in all directions. Consequently, the behavior of the display device, if optimized for one viewing angle, will be poorer for other viewing angles (angle dependence).

It is, inter alia, an object of the present invention to eliminate said drawbacks as much as possible. In accordance with a first embodiment of the invention, the means for switching between the different types of images therefore comprise at least one reservoir which is provided with elements having a lens action at the area of a wall of the reservoir and is also provided with means for filling, at the area of the elements having a lens action, the reservoir between the wall provided with elements having a lens action and a facing transparent wall with a fluid having a refractive index which is substantially identical to that of the elements having a lens action.

Since an isotropic medium is present in this case, both in the presence and absence of the fluid between the flat substrate and the substrate provided with elements having a lens action, said angle dependence is now negligible. Moreover, the difference of refractive index between a suitable fluid and air is usually larger than said 0.2 (in a typical example about 0.48) so that a smaller thickness of the lenticular sheet is sufficient.

The light-transmissive part will neither require any (ITO) electrodes or coatings so that the transmission is enhanced.

In a second embodiment of the invention, the means for switching between the different types of images comprise at least one reservoir which is provided with elements having a lens action at the area of a wall of the reservoir, and the reservoir contains at least two substantially immiscible fluids having a different refractive index as well as a difference of electrical conductivity, while the display device is also provided with drive means for displacing the fluids with respect to each other. The reservoir may be limited to one pixel in this case, but it may be alternatively common for a plurality of pixels.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 is a cross-section of a display device according to the invention, while

Fig. 2 shows a typical application, and

Fig. 3 shows a variant of Fig. 1.

The Figures are diagrammatic and not drawn to scale; corresponding parts are generally denoted by the same reference numerals.

Fig. 1 is a diagrammatic cross-section of a part of a display device 1 with a liquid crystal panel 2 comprising a plurality of pixels 3. The display device is customarily provided with a (flat) light source or backlight 4. For the sake of simplicity, only the pixels 3 and the backlight 4 are shown. Substrates and other possible elements such as polarizers, retardation foils, etc. are not shown in Fig. 1.

The device of Fig. 1 further comprises a reservoir 5 which is provided with transparent elements having a lens action 6 at the area of a transparent wall 7 of the reservoir 5. The reservoir 5 further has a transparent wall 10 facing the wall 7. In this example, the reservoir 5 is sealed with an extra portion 5<sup>a</sup>. This extra portion 5<sup>a</sup> does not belong to the actual pixel and is preferably covered with a black mask 13.

The reservoir 5 of, for example, glass is adapted in such a way that it can switch between a first state, in which the reservoir between the wall 7 and the transparent wall 10 is completely filled with a fluid having a refractive index which is substantially identical to that of the lens-shaped elements, and a second state in which there is no fluid 9 between the wall 7 and the transparent wall 10. The first state is shown in the left-hand part of Fig. 1, in which the space between the walls 6, 10 is filled with a salt solution 9<sup>a</sup>, in this example a mixture of 30% by weight of water and 70% by weight of cesium metatungstate. This mixture has an isotropic refractive index of approximately 1,486 which is substantially equal to that of the lens system used which, in this example, consists of an UV-tempered polymer acrylate. Other metatungstates may be alternatively used such as, for example, ammonia metatungstate, or other suitable salt solutions.

In this state, light coming from the backlight 4 is substantially not refracted by the lens-shaped elements 6, as is indicated by arrows 14 in Fig. 1.

The second state is shown in the right-hand part of Fig. 1, in which the space between the walls 6, 10 is filled with air, which is denoted by reference numeral 9<sup>b</sup>, having an isotropic refractive index of approximately 1. In this state, light coming from the backlight 4 is refracted by the lens-shaped elements 6, as is indicated by arrows 15 in Fig. 1.

The difference in both states is thus determined by the absence or presence of the fluid 9<sup>a</sup> between the wall 7 and the wall 10. The presence or absence may be realized, for example, by means of pumping. Electronic pumping is suitable in this respect, while an alternative possibility is electrowetting, notably when small surfaces are concerned. Pumping may be accelerated by using, instead of air, a liquid having a low refractive index.

Fig. 2 shows how the display device 1 of Fig. 1 can be used. In this Figure, a part of a panel 2 is shown with a part of a reservoir 5 which is provided with lens-shaped

elements 6 and has some typical light paths associated with pixels (or columns of pixels) A, B, C, D. Fig. 2A is related to the situation of the second state described above, in which light from each pixel (or columns of pixels) A, B, C, D is refracted in a different way by the lens-shaped element 6 (denoted by dotted lines, solid lines, broken lines and dot-and-dash lines, respectively). Due to the lens action of the lens-shaped elements 6, the light from the pixels (or columns of pixels) A, B, C, D is deflected in different directions and a viewer sees light coming from different pixels with different eyes (stereo image). In Fig. 2B, related to the situation of the first state described above, the lens action is eliminated and the viewer sees all pixels (columns of pixels) A, B, C, D with each eye.

10                If necessary, the fluid 9<sup>a</sup> may also be pumped partly between the wall 7 and the wall 10, for example, when simultaneously displaying text and a stereo image on a panel.

              The protective scope of the invention is not limited to the embodiments described. For example, instead of a liquid crystal display device it is alternatively possible to use other suitable display devices based on, for example, electroluminescence or switchable mirrors. Several variations are also possible for the implementation of the elements having a lens action.

              Finally, the variant of Fig. 3 shows a display device with a plurality of sub-reservoirs 5' containing, in a transparent, for example, glass or plastic envelope, two liquids or fluids 9<sup>a</sup>, 9<sup>b</sup> (with isotropic refractive indices of about 1.486 and about 1.3), which do not mix with each other and one of which is electrically conducting and the other is insulating. In this example, the sub-reservoirs contain, for example, an aqueous solution 9<sup>a</sup> (electrically conducting) of, for example, a metatungstate, whereas a non-polar oil such as an alkane (for example, dodecane or hexadecane), a silicon oil, chloronaphtalene, bromonaphtalene or 1-bromododecane is chosen as an insulating fluid.

25                If necessary, the fluids 9<sup>a</sup>, 9<sup>b</sup> can change places within the glass or plastic envelope.

              For the purpose of electrically switching between two states (two and three-dimensional, denoted by 2D and 3D in Fig. 3), each sub-reservoir comprises an electrode 16, coupled to the electrically conducting fluid, and a further electrode 17, coupled to a transparent (ITO) electrode 22 which is coated with a hydrophobic coating 23. Via the electrodes 16, 17, individual pixels or a plurality of pixels are jointly provided with voltages (via a potential V of a voltage source 18 shown diagrammatically). Although the electrodes are shown outside the reservoir for the purpose of understanding the invention, they are provided within the reservoir in practice and insulated from the fluids by means of an

insulating coating having a low wetting hysteresis such as a fluoropolymer. The other reference numerals have the same significance as in the previous embodiment.

The electrically conducting fluid is attracted by electrostatic forces on the electrodes. The electrostatic forces determine the mutual position of the fluids. By changing  
5 the potential  $V$ , the location of the fluids can thus be influenced. The potential may also be provided on the conducting liquid via capacitive coupling.

Dependent on providing or not providing the potential  $V$ , the interface between the fluids in Fig. 3 is substantially parallel to the upper and lower wall of the sub-reservoir (2D image, there is no refraction at one of the interfaces) or (in this embodiment)  
10 substantially parallel to the side walls (3D image, there is refraction at the interfaces between the lens-shaped element 6 and the fluid 9<sup>b</sup>).

In this embodiment, the electrode 6 is only shown on the lower side of the pixel because this is favorable when joining a plurality of pixels on one substrate, for example, in a matrix display device. In other cases, it is advantageous to provide the  
15 electrode 6 also along the wall of the reservoir 13. This is diagrammatically shown by way of broken lines in Fig. 3.

Instead of the lens-shaped elements 6, other elements having a lens action may be alternatively used such as, for example, a graded index lens or a Fresnel structure.

The invention resides in each and every novel characteristic feature and each  
20 and every combination of characteristic features. Reference numerals in the claims do not limit their protective scope. Use of the verb "comprise" and its conjugations does not exclude the presence of elements other than those stated in the claims. Use of the article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

## CLAIMS:

1. A display apparatus provided with a display device for displaying images comprising pixels and further provided with means for switching between different types of images coming from the pixels, in which the means for switching between the different types of images comprise at least one reservoir which is provided with elements having a lens  
5 action at the area of a wall of the reservoir and is also provided with means for filling, at the area of the elements having a lens action, the reservoir between the wall provided with elements having a lens action and a facing transparent wall with a fluid having a refractive index which is substantially identical to that of the elements having a lens action.
- 10 2. A display apparatus as claimed in claim 1, wherein the switching means switch the display device between a stereoscopic image and a plane image.
3. A display apparatus as claimed in claim 1, wherein the reservoir contains a fluid having a refractive index which is substantially identical to that of the elements having a  
15 lens action contains a plurality of fluids having substantially the same refractive index.
4. A display apparatus as claimed in claim 1, wherein the pitch of the elements having a lens action is larger than that of the pixels.
- 20 5. A display apparatus as claimed in claim 1, wherein the fluid comprises a metatungstate.
6. A display apparatus provided with a display device for displaying images comprising pixels and further provided with means for switching between different types of  
25 images coming from the pixels, in which the means for switching between the different types of images comprise at least one reservoir which is provided with elements having a lens action at the area of a wall of the reservoir, and the reservoir contains at least two substantially immiscible fluids having a different refractive index as well as a difference of

electrical conductivity, said display device being also provided with drive means for displacing the fluids with respect to each other.

7. A display apparatus as claimed in claim 6, wherein the switching means  
5 switch the display device between a stereoscopic image and a plane image.
8. A display apparatus as claimed in claim 6, with two immiscible fluids having a  
different refractive index, one of which is electrically conducting and one of which is  
substantially insulating.
- 10 9. A display apparatus as claimed in claim 6, wherein the drive means comprise  
at least two electrodes at the area of the wall of the reservoir, which electrodes can be  
electrically coupled to the fluids.



1/2

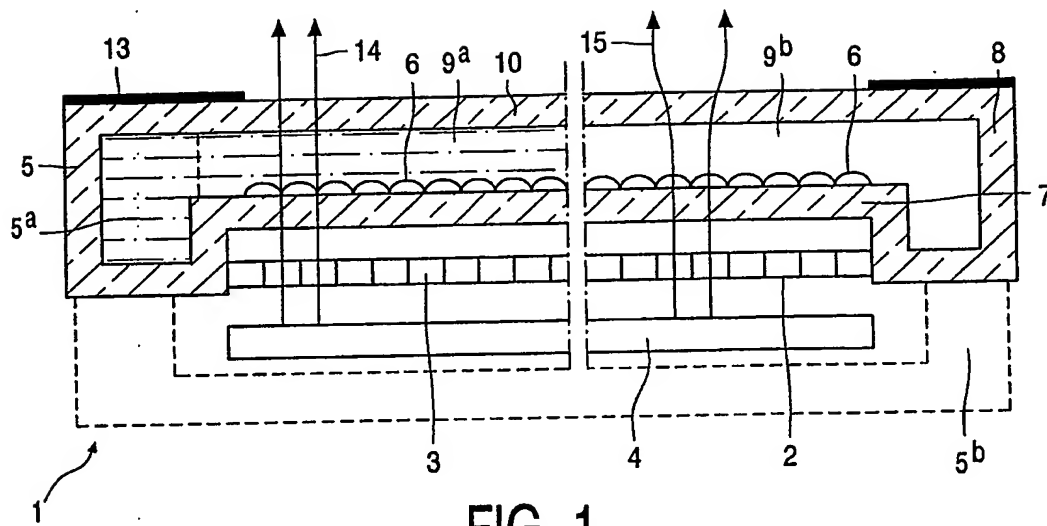


FIG. 1

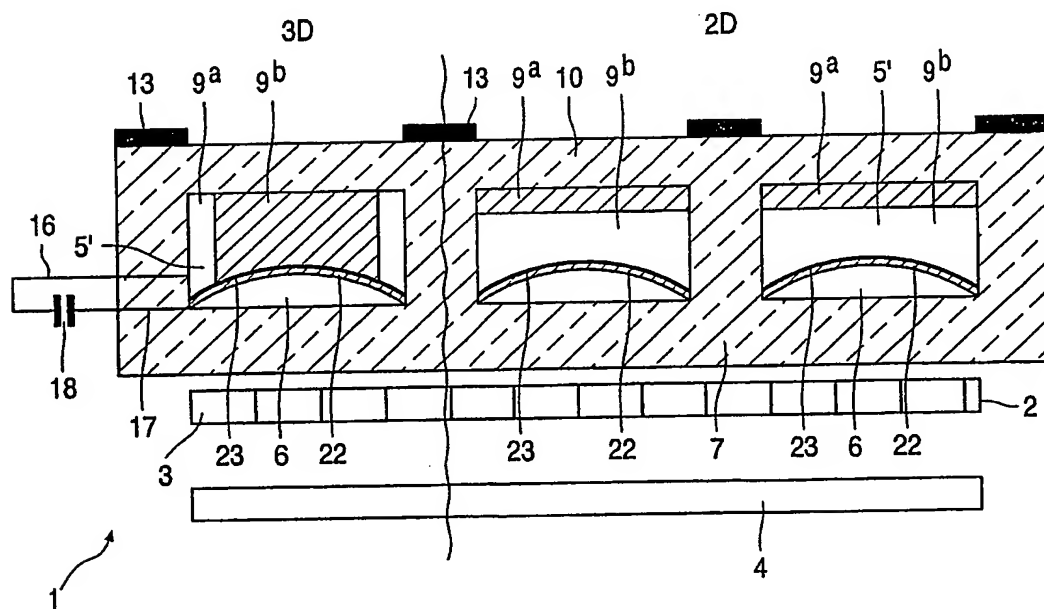


FIG. 3

2/2

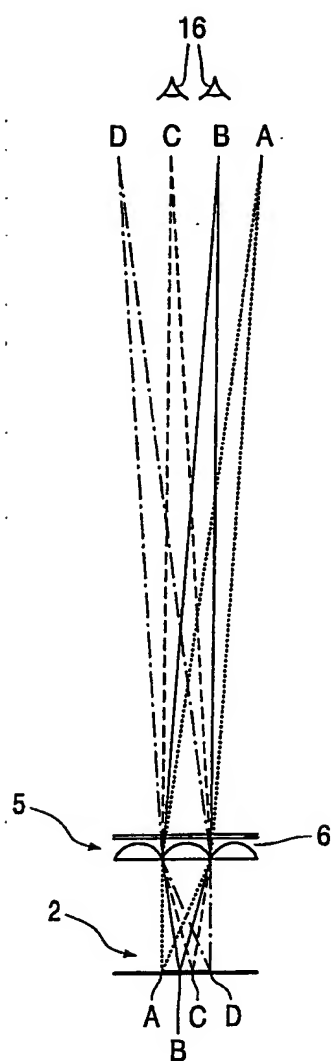


FIG. 2A

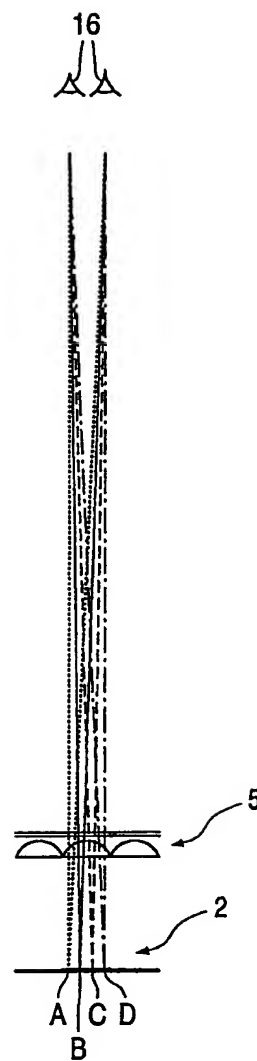


FIG. 2B

## INTERNATIONAL SEARCH REPORT

Intern      Application No  
PCT/IB 02/03842A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7    H04N13/00    G02B27/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7    H04N    G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 07, 31 July 1996 (1996-07-31) & JP 08 068961 A (NEC CORP), 12 March 1996 (1996-03-12) abstract	1-9
P, X	DE 100 25 226 A (4D VISION GMBH) 29 November 2001 (2001-11-29) paragraph '0011!; figure	1-9
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) & JP 2000 102038 A (SANYO ELECTRIC CO LTD), 7 April 2000 (2000-04-07) abstract	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

20 November 2002

Date of mailing of the international search report

27/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Montanari, M

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 02/03842

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 069 650 A (BATTERSBY STEPHEN J) 30 May 2000 (2000-05-30) cited in the application -----	
A	US 5 091 801 A (EBSTEIN STEVEN) 25 February 1992 (1992-02-25) -----	

## INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/IB 02/03842

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 08068961	A	12-03-1996	NONE	
DE 10025226	A	29-11-2001	DE 10025226 A1	29-11-2001
JP 2000102038	A	07-04-2000	NONE	
US 6069650	A	30-05-2000	EP 0877966 A1	18-11-1998
			WO 9821620 A1	22-05-1998
			JP 2000503424 T	21-03-2000
US 5091801	A	25-02-1992	NONE	

**THIS PAGE BLANK (USPTO)**